

7/8" Mini-Receptacle Connectors, Front Mount, EURO AC Color Code

RSF 30 | RKF 30




Male, 3-Pole

Receptacle connector, 7/8"-A body, male
3-pole for front mounting, assembled stranded wire, potted with epoxy, chassis side thread 1/2" NPT, screw connection.

- EURO AC Color Code -

RSF 30




Female, 3-Pole

Receptacle connector, 7/8"-A body, female
3-pole for front mounting, assembled stranded wire, potted with epoxy, chassis side thread 1/2" NPT, screw connection.

- EURO AC Color Code -


RKF 30

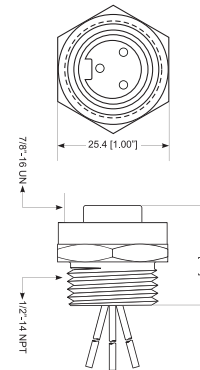

Pin Assignments

Face Views, 7/8"-Male / Female

3 pole



- 1 = yellow/green
- 2 = brown
- 3 = blue



7/8" Mini-Receptacle Connectors, Front Mount, EURO AC Color Code
 RSF 30 | RKF 30

Technical Data

Environmental

Degree of protection IP 68 / NEMA 6P
 Operating temperature range -40°C (-40°F) / +90°C (+194°F)

Mechanical

Insert TPU, yellow
 Contacts CuZn, gold plated
 Receptacle shell RSF: Zinc die cast (e-coated black)
 RKF: Aluminum (clear anodized)
 Locknut Steel, zinc plated
 O-ring Viton

Electrical

Current rating 8 A
 Voltage rating 300 V

Part Number	Pins	Gauge	Characteristics
RSF 30-601/0.3M RKF 30-601/0.3M	3	18	  